

# BRYCE PERFORATED

Hanging Down Light for AR11 or MR16



## DESCRIPTION

In a longer footprint than the original Bryce Hanging Down Light, the Bryce Perforated Hanging Down Light keeps the same one-piece construction and adds ambiance with its precision machined perforations.

## BRYCE PERFORATED HANGING DOWN LIGHT


Use	<b>Downlighting Techniques in Trees or Architecture by Hanging on a Chain or Cable</b>	
Finish	<b>Brass, Copper, or Brass w/ Black Cerakote®</b>	
Includes	<b>LightingShrink Professional Crimp and Heat Shrink Cable Connector</b>	
Warranty	<b>Lifetime Warranty on National Parks Series Fixtures</b>	
Order With Lamp	<b>AR11, 2W, 2700K, 60°</b>	BRYCE-HDL-AR11-PERF-CU BRYCE-HDL-AR11-PERF-BR BRYCE-HDL-AR11-PERF-BR-BLK
	<b>MR16, 4W, 2700K, 60°</b>	BRYCE-HDL-MR16-PERF-CU BRYCE-HDL-MR16-PERF-BR BRYCE-HDL-MR16-PERF-BR-BLK
Order Without Lamp	<b>Fits AR11</b>	BRYCE-HDL-AR11-PERF-CU-NL BRYCE-HDL-AR11-PERF-BR-NL BRYCE-HDL-AR11-PERF-BR-BLK-NL
	<b>Fits Chameleon MR16, MR16</b>	BRYCE-HDL-MR16-PERF-CU-NL BRYCE-HDL-MR16-PERF-BR-NL BRYCE-HDL-MR16-PERF-BR-BLK-NL




Brass (BR)



Copper (CU)

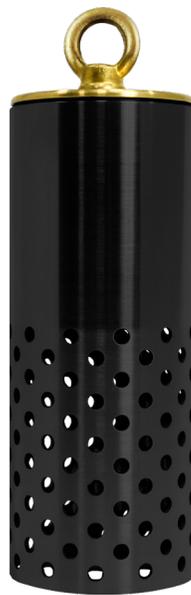

Brass + Black Cerakote®  
(BR-BLK)

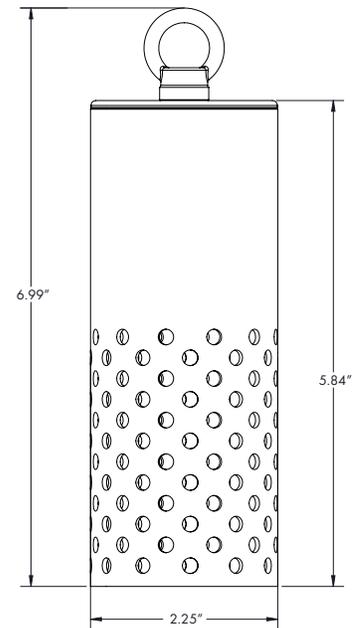



**BRYCE-HDL-MR16-PERF-BR**

#### **INSTALLING THE LAMP**

1. Unscrew the perforated shield from the lid.
2. Install the lamp in the socket.
3. Reinstall the fixture body.

#### **HANGING THE FIXTURE**

**IMPORTANT: DO NOT INSTALL ON OR NEAR ANY HIGH VOLTAGE POWER LINES**

1. Hang the fixture from a secure stainless steel eye bolt, with or without a chain.
2. Create a drip loop with the wire by bending the wire to a slope one inch below the fixture cap.