

Lens:

ARCHITECTURAL GRADE SERIES

SPECIFICATION SHEET

1633 Staunton Ave Los Angeles, CA 90021

TEL. FAX. (800) 727-9262 (800) 727-9957

(800) 727-9262 (800) 727-9957 (213) 747-4500 (213) 747-3234

E-Mail: sales@coronalighting.com

PRODUCT #: CL-649B-GM

Area Lights

Wiring:

• Cast Brass

Fixture Specifications:

Housing: Brass shade, adjustable in height for light control.

Stem: Solid brass pipe with ½" NPT on bottom.

Finish: GM- Gun Metal. Natural toning process.

GM finish will vary due to artistic process. Also available in **AB- Antique Bronze**

•

Clear glass, cover over lamp providing sprinkler

water protection. Frosted lens (CX-308-FR) available.

Socket: S.C. Bayonet socket, easy tool free lamp access.

Lamp: 12 volt, S.C Bayonet 27W Max. L-SCB-1141 (18W)

standard. LED lamps available in 2W and 2.5W, with 2700K-warm white or 3000K-cool white color temperature.

Xenon and halogen lamps also available.

Gasket: Silicone "O" ring gasket seals lens to socket housing

for water tight sealing.

Area Lights • Cast Bra

Fixture is prewired with a 3ft, 18-2 direct burial cord. Wire connector sold seperately. Universal connector

(CX-839) or silicone filled wire nut (CX-854) is

available from Corona Lighting.

Mounting Spike: Standard injection molded spike with ½" NPT

threaded female hub.

Electrical Notes: A remote 12V transformer is required. Options are


available from Corona Lighting.

Voltage range for 12V halogen lamps are 11V-12.5V

Voltage range for LED lamps are 8V-21V. Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited lifetime warranty on fixture housing and

stem against manufacturer's defects.

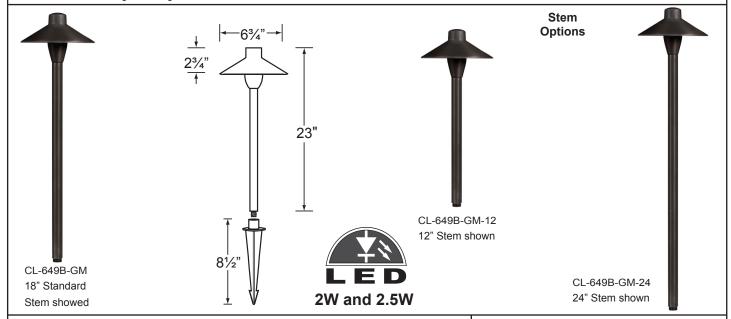

AVAILABLE LED LAMPS (Corona LED lamps have a five (5) year limited warranty against manufacturer's defects)

	_			_ 0020114	IVAILD	IIALOGEN
LAMP NUMBER	WATTS	SPREAD	LUMEN	TEMP.	HOURS	EQUIVALENT
L-EDBA-2W	2	360°	200	2700K	25,000	20 Watt
L-EDBA-2.5W	2.5	180°	240	2700K	25,000	35 Watt
L-EDBA-2W-3K	2	360°	210	3000K	25,000	20 Watt
L-EDBA-2.5W-3K	2.5	180°	250	3000K	25,000	35 Watt
L-EDBA-AM	2	360°	170	2000K	25,000	20 Watt

AVAILABLE HALOGEN LAMPS		BEAM		COLOR &	RATED
LAMP NUMBER	WATTS	SPREAD	LUMEN	TEMP.	HOURS
L-SCB-89	7		75	2700K	750
L-SCB-93	13		190	2700K	700
L-SCB-1141	18		265	2700K	1,500
L-SCB-1156	27		400	2700K	1,200

AM- Amber color

For more additional Lamps, and accessories visit Coronalighting.com

JOB INFORMATION

TYPE: DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• When ordering a halogen or xenon lamp add lamp number to the product number. If you are ordering LED lamps you should follow the format below:

• CL - product # - lamp - wattage CL - 649B-GM - L-EDBA - 2W-3K

Example: CL-649B-GM-L-EDBA-2W-3K

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixure without further notification.