


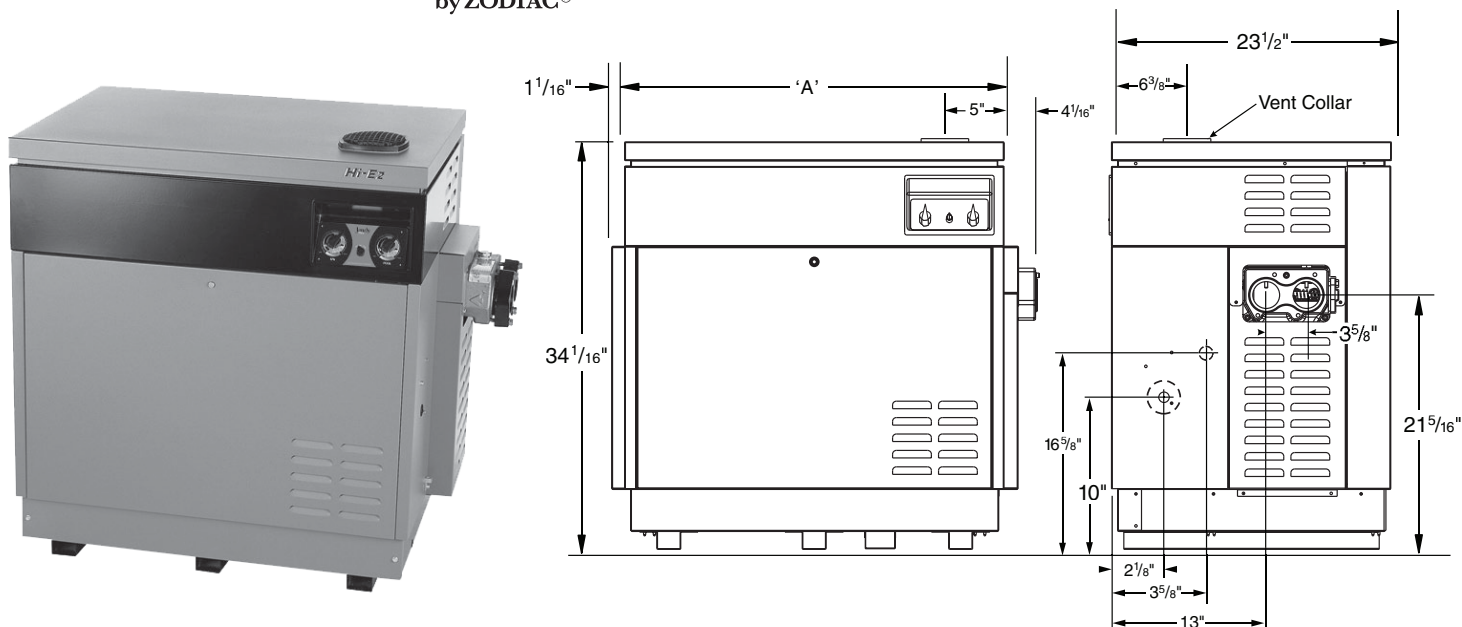

- An impressive 95% heating efficiency rating — the most efficient available without costly add-ons.
- A unique forced-air system makes this the ideal heater for use in extreme weather and in difficult or unusual locations.
- Dual thermostat controls make this an excellent choice for pool/spa combinations.
- Safe and easy to maintain, the Hi-E2 employs our hot surface ignition system, completely eliminating the pilot light.
- High-tech composite materials and quality construction make this a very durable unit.

Part No.

Description

EHE350NC	HiE2, 350K BTU, NAT, ASME Certified
EHE350PC	HiE2, 350K BTU, LP, ASME Certified
EHE350NS	HiE2, 350K BTU, NAT, ASME/Salt Water
EHE350PS	HiE2, 350K BTU, LP, ASME/Salt Water

Specifications and Dimensions

Model No.	Width 'A'	Input	Shipping Weight
350	31 7/8	350,000	252 lbs.

Hi-E2® Pressure Drop Curves

