



# LIFE PAINT

PRODUCT SPECIFICATIONS



## WATERPROOFING


### LIFE DECK HOT DIPPED GALVANIZED METAL LATH 2.5

Life Paint's GML-PCS hot dipped 2.5 galvanized Metal Lath is a versatile metal lath ideal as a plaster base and reinforcement for all types of walls, ceilings and fireproofing of steel beam, and columns. Easy to cut and form to ornamental plaster work. Provides ample keying for scratch coat and is commonly used for plaster machine application. This lath meets the following specifications:

Federal Specification - QQ-L-101C American National Standard Specification - ANSI A42.3 and A42.4 American Society for Testing Materials - ASTM C841 and ANSI/ASTM C847

U. S. Department of Housing and Urban Development (HUD) Standards 4930.1 Uniform Building Code, 2001 Calif. Bldg Code, 2003 IBC - Chapter 25 For further information see ICBO ES Report No. 4120

**WARRANTY:** When the warranted product is applied in accordance with label instructions and common sense widely accepted painting practice and procedures, Life Paint will warrant said product against manufacturing defects that might cause premature failure such as blistering, peeling, or unusual wear. Directions are as complete as possible but cannot encompass all conditions, applications, and/or surfaces beyond manufacturer's control. In the event of a warranted failure and upon the presentation of proof of purchase, the remedy will be the provision price for said product. This warranty does not include labor or the costs associated with labor. This warranty may not be transferred or assigned and extends specific legal rights which may vary from state-to-state. No other warrantee is expressed or implied.

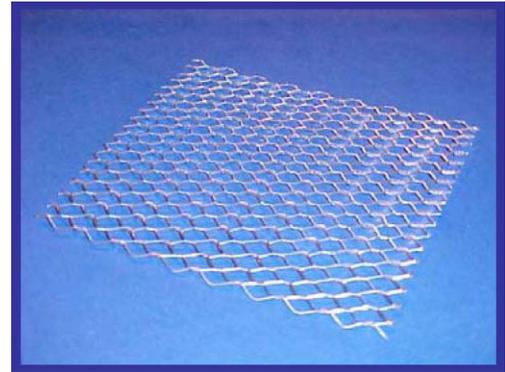

<b>Wt. Per Sq. Yd.</b>	<b>Sheet Size</b>	<b>Yds. / Pallet</b>
<b>2.50 lbs.</b>	<b>27" x 96"</b>	<b>1000</b>