




PLASTIC CEMENT

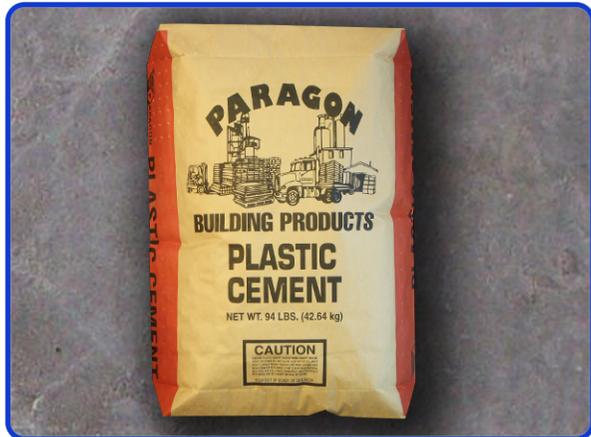

PLASTIC CEMENT is a mixture of proprietary blend of Portland and hydraulic cements, as well as other ingredients to improve characteristic performance.

BASIC USE:

Mix with plaster sand to prepare Portland cement based plaster/stucco applications. It has a high degree of plasticity or workability. For use in interior and exterior Plaster/Stucco applications.

MIXING:

Use mechanical mixer and sufficient clean portable water to produce workable consistency and uniform color.

CURING:

This product requires a minimum of 48 hours of moist curing. Proper curing of a well proportioned and consolidated plaster is critical to obtaining optimum crack resistance. Environmental conditions such as heat, wind, and low humidity all require liberal curing.

Note: As with all Portland Cement based materials, surface cracking may occur due to curing conditions such as over watering, over troweling, or other conditions beyond the control of Paragon.

TEMPERATURE:

Do Not Use Stucco at temperatures below 40°F (4.4°C) or if the temperature is expected to fall below freezing point within 48 hours.

TECHNICAL DATA:

The plastic cement is in conformance with ASTM C-1328, Standard Specification for Plastic/Stucco cement type S and M, meets the requirements of ASTM C-91, "Standard Specification for Masonry Cement" and it should be used in accordance with the procedures given in ASTM C- 926, "Standard Application of Portland Cement-Based Plaster" A check of local building codes and job specifications will confirm the correct cement-to-sand proportions.

LIMITATIONS:

- ◆ Do not use this product alone
- ◆ Must be mixed with plaster sand
- ◆ Do not apply when surface or ambient temperatures are at or below 40°F/ 4.4°C or above 100°F/ 34°C
- ◆ Do not apply to surfaces that are contaminated with bond breakers, oil or other materials that may affect the performance of the product.

Color: Light Brown

Packaging:

94 lb. / 42.64 kg multi-ply bags	35/ pallet
47 lb. /21.32 kg multi-ply bags	70/ pallet
3,000 lb. Tote	

Safety Precautions:

Plastic Cement contains Portland cement. Normal safety wear such as rubber gloves, dust mask and safety goggles, standard protection used to handle conventional cement-based product. MSDS is available

DIVISION 3 CONCRETE AND DIVISION 4 MASONRY APPLICATIONS FOR CEMENT BASED PLASTER/STUCCO



SAFETY PRECAUTIONS CONTINUED:

upon request.

Limited Warranty:

Paragon Building Products, Inc. liability for damages or defective goods shall be limited to the refund of the purchaser price or product replacement.