

# Easy to Install, Simple to Maintain





# Easy to Install, Simple to Maintain

Our Top-Mount Sand Filters are designed with features to make installation easy and filter more water, faster.

### >> SFTM


- Large 2" valve for increased flow and enhanced filtration (SFTM24-2.0)
- 7-position multi-port valve can be rotated to quickly adjust filter mode
- 360° clamp-style valve rotates for easy installation
- Laterals fold up/down for quick installation and to service (SFTM24-2.0)
- Blow-molded tank is corrosion- and UV-resistant
- Combination water/sand drain for easy maintenance
- Unions and adapters included— no need to buy additional parts



7-position multi-port valve for 2" plumbing (SFTM24-2.0)



SFTM24-2.0

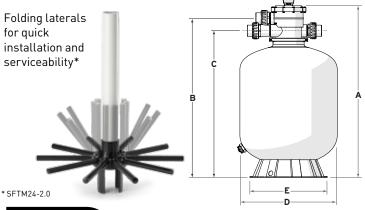

### **DIMENSIONS**

	SFTM22-1.5	SFTM24-2.0
Height - Dimension "A"	31"	41.85"
Inlet Port - Dimension "B"	33.4"	38.75"
Outlet Port - Dimension "C"	28.6"	35.75"
Tank Width - Dimension "D"	22"	23.75"
Base Width - Dimension "E"	19"	19"

## **SPECIFICATIONS**

	SFTM22-1.5	SFTM24-2.0
Filtration Area	2.60 ft <sup>2</sup>	3.04 ft <sup>2</sup>
Valve Plumbing Size	11/2"	2"
Filtration Flow Rate	50 gpm	60 gpm
Backwash Flow Rate	38 gpm	40 gpm
Max Working Pressure	35 psi	35 psi
Eight (8) Hour Turnover Rate	24,960 gallons	29,760 gallons
Ten (10) Hour Turnover Rate	31,200 gallons	37,200 gallons
Sand Required	250 lbs.	300 lbs.
Sand Requirements	#20 Silica Sand 40-55mm	#20 Silica Sand 40-55mm

#### Zodiac Pool Systems, Inc.

2620 Commerce Way, Vista, CA 92081 1.800.822.7933 | www.zodiac.com

#### Zodiac Pool Systems Canada, Inc.

2115 South Service Road West, Unit #3, Oakville, ON L6L 5W2 1.300.763.021 | www.ZodiacPoolSystems.ca